


Hybrid Pure Sine Wave Inverter 1500W

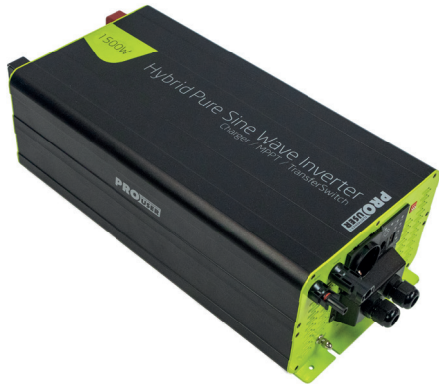

**PSI1500TX
Hybrid**

Name	PSI1500TX Hybrid
Art.no.	19141
EAN	8717809191410

Input DC	
Battery voltage	10.5V–16V
Maximum input current	142A
Standby current	< 0.65A
High voltage protection	16V
Low voltage protection	10V

Miscellaneous	
USB socket output	2.1A / 5V
Dimensions <small>including connections</small>	L350 x W220 x H150 mm
Weight	7 kg
Operating temperature	0°C - 40°C
Storage temperature	-30°C - 70°C
Cooling	Air-cooled

Output AC	
AC voltage	230V
Frequency	50Hz
Rated output power	1500W
Surge power	1800W (10S)
Peak power	3000W (2S)
Efficiency	>90%


Accessories	
Remote control	1x
Remote control wiring	1x
Battery wiring	1x
Automatic transfer switch	1x
Protection	AC short circuit & overload protection

Solar charger

Charge controller type	MPPT
Maximum charge current	40A
Maximum input Solar (W)	600W
Input Voltage Range	15 -70V
Charge Efficiency	97%
Connector type	MC4

Battery charger

Suitable for battery	STD, AGM, GEL & LiFePO4
Maximum charge current	20A
Input voltage range	185 - 260V AC
Output voltage range	12V DC

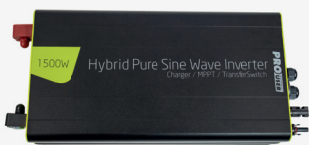

Pure Sine Wave Inverter
PSI1500TX Hybrid

PROUSER ELECTRONICS®